




Department of Public Utilities

CSO Outfall 004 Improvement Project

Project Information



The CSO Outfall 004 Improvement Project is one of the mandated projects in Richmond's Combined Sewer Overflow Interim Plan. This work includes the installation of a larger pipe that will hold more combined sewer system volume and infrastructure that will control flow. It will include construction of new underground sanitary sewer pipelines, an outfall into Gillies Creek, a CSO-004 regulator, access driveway, deep 60" diameter sanitary sewer manholes and tying into the existing Fulton Bottom Interceptor. This project will reduce the number of combined sewer overflow events (by an estimated 48 events annually) and reduce combined sewer overflow volume by an estimated 5.1 million gallons annually. This project is funded by a \$100 million grant from the American Rescue Plan Act (ARPA).



CSO Outfall 004 Improvement Project



Current Status

The construction contract was awarded to English Construction in spring 2023 and construction began in late summer 2023. The project is approaching the 50% point in the construction schedule. Short-term delays have been encountered due to work around subsurface utilities, but the construction team still intends to complete construction near the original contract end date. Key construction milestones so far include completion of the lower portion of the new CSO regulator structure (pictured above) and the launching pits for upcoming pipe tunneling (under the railroad).

FAQs

Will there be traffic impacts?

Yes, there will be traffic impacts along Williamsburg Road. Digital sign boards will be positioned to inform residents of the traffic re-routing.

Will trees be removed?

Yes, trees will need to be removed to install the pipe and flow control infrastructure. As many trees as possible will be replanted on site, and those that cannot be replanted on this site will be planted in other parts of the city.

Will the public have access to the Stone Brewing parking lot on Williamsburg Road?

Yes, the contractor will provide a means to access the Stone Brewing parking lot on Williamsburg Road.

Will parking remain available for Gillies Creek Park on the corner of Stony Run Road and Williamsburg Road?

Yes, parking will be shifted east, but will be available.

Will the public have access to the trails between Williamsburg Road and Chimborazo Park?

Access to these trails will be limited due to construction.

How long will construction last?

Construction anticipated in July of 2023 and is estimated to take approximately 18 months to complete.

CSO Outfall 004 Improvement Project

How is this project being funded?

The CSO Outfall 004 Improvement Project is one of the ten combined sewer projects in Richmond's CSO Interim Plan that have received federal funding support from the American Rescue Plan Act (ARPA), administered by the Virginia Department of Environmental Quality.


How does this project benefit the community?

This project will reduce the number of combined sewer overflow events (by an estimated 48 events annually) and reduce combined sewer overflow volume by an estimated 5.1 million gallons annually.

How can I keep up to date with project status?

Project updates can be found at RVA.gov/public-utilities/news/combined-sewer-overflow-outfall-004-project.

For more details on the City of Richmond CSO Program, visit <https://rvah2o.org/richmond-css/>.

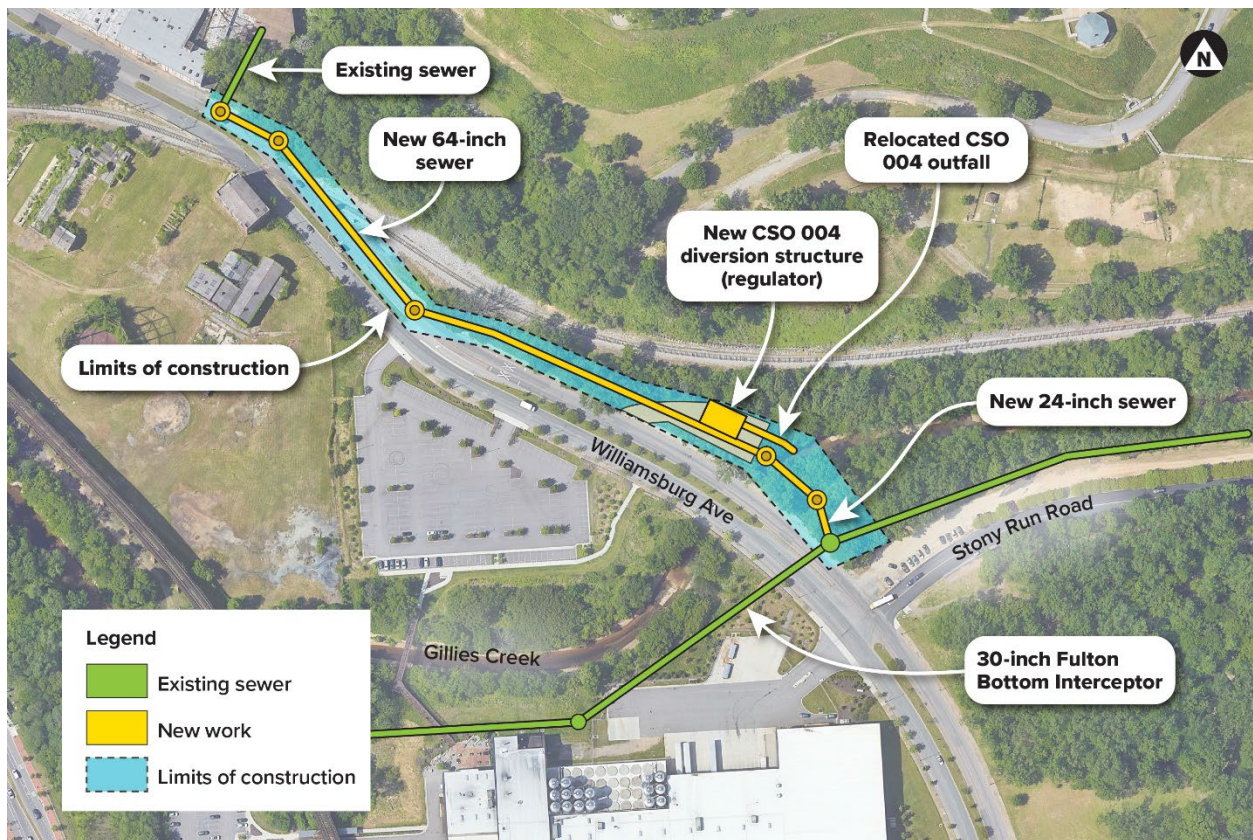

If you have questions or comments about this project, please contact the Department of Public Utilities:

Robert Stone
Engineering Manager
(804) 646-8557
Robert.Stone@rva.gov

Media Contact:
Rhonda Johnson
Public Information Manager, Senior
(804) 646-5463
Rhonda.Johnson@RVA.gov